




ROHS-Compliant Product

Standard Filters 10.7MHz



10.7 MHz Standard series					
Type:	XF-107A	XF-107B	XF-107C	XF-107D	XF-107E
Channel spacing	20	25	50		
3 dB-bandwidth (kHz):	± 6	± 7.5	± 15	± 18	± 20
Insertion loss max.(dB):	3.5		4.5		
Ripple max.(dB):	2.0				
Stopband attenuation (dB / kHz) (dB /- kHz):	>70 / ± 14.5 >90 / ± 17	>70 / ± 17 >90 / ± 22	>70 / ± 33 >90 / ± 40	>70 / ± 35 >90 / ± 45	>70 / ± 40 >90 / ± 50
Number of poles	8				
Ultimate attenuation dB:	> 90				
Termination (Ω // pF):	820 // 25	910 // 25	2000 // 25	2700 // 25	3000 // 25
Case style:	BF-1				
Temperature ranges Operating: Operable: Storage:	- 20°C ... + 70°C - 40°C ... + 80°C - 55°C ... + 105°C				
Max. input power	1.0 mW				

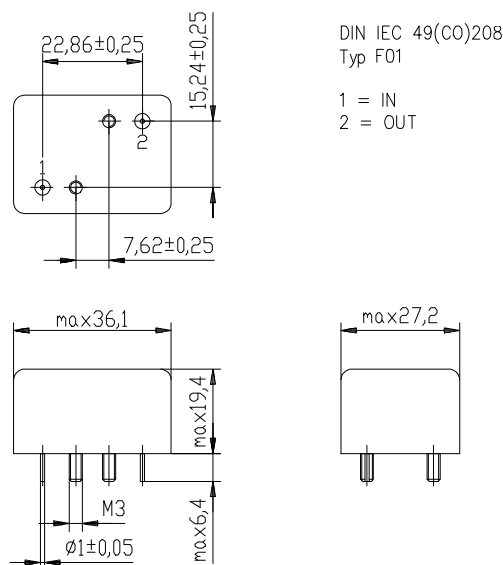

Case Style BF-1

KVG Quartz Crystal Technology GMBH

D-74922 Neckarbischofsheim P.O.B. 61 74924 Neckarbischofsheim Waibstadter Strasse 2 - 4
 Tel: +49 (0) 7263 / 648 - 0 Fax: +49 (0) 7263 / 6196 e-mail:info@kvg-gmbh.de