



ROHS-Compliant Product

Monolith-Selectionfilter



Examples of our product range > 21.4 MHz

Type	Frequency	Case Style	Passband		Stopband		Termination in/out	POLE	Insertion loss max.
	MHz		dB	± kHz	dB	± kHz	(Ω)		dB
XFM-214S68-LF	21,40375	BF15	3	3,75	70	9	910 // 15 pf	8	3,5
XFM-214S55-LF	21,4075	BF15	3	3,75	90	11	910 // 15 pf	8	3,5
XFM-214S80-LF	21,41	BF19	3	6	65	14	910 // 4 pf	8	3
XFM-214S101-LF	21,41345	BF10-13.0	3	13,45	30	28	50	6	5
XFM-214S52-LF	21,416	BF14	6	8,5	80	35	1800 // 1 pf	6	4
XFM-214S77-LF	21,425	BF25	3	7,5	30	17,5	1600 // 1,5 pf	4	2
XFM-214S53-LF	21,432	BF14	6	8,5	80	35	1800 // 1 pf	6	4
XFM-214S67-LF	21,45	BF10-15.9	3	7,5	70	17	910 // 25 pf	8	3,5
XFM-214S78-LF	21,45	BF25	3	7,5	30	17,5	1600 // 1,5 pf	4	2
XFM-216S06-LF	21,60	BF15	3	3,75	60	12,5	50	6	3
XFM-216S05-LF	21,60	BF15	3	6	80	25	50	6	3
XFM-216S01-LF	21,60	BF10-13.0	6	11	60	22	910 // 25 pf	8	3
XFM-216S09-LF	21,65	BF31	3	17	60	80	50	6	4
XFM-218S03-LF	21,80	BF15	3	3,75	60	12,5	50	6	3
XFM-218S02-LF	21,80	BF15	3	6	80	25	50	6	3
XFM-219S01-LF	21,90	BF15	3	3,75	60	12,5	50	6	3
XFM-220S02-LF	22,00	BF15	3	6	80	25	50	6	3
XFM-221S02-LF	22,10	BF15	3	3,75	40	12,5	50	4	3
XFM-226S04-LF	22,60	BF15	3	3,75	40	12,5	50	4	3
XFM-228S03-LF	22,80	BF15	3	3,75	60	12,5	50	6	3
XFM-230S07-LF	23,00	BF15	3	3,75	60	12,5	50	6	3
XFM-230S03-LF	23,00	BF15	3	6	80	25	50	6	3
XFM-231S01-LF	23,15	BF15	3	3,75	40	12,5	50	4	3
XFM-240S04-LF	24,00	BF10-13.0	3	3,75	70	7,5	910 // 25 pf	10	5
XFM-240S01-LF	24,00	BF10-13.0	3	17	70	34	910 // 25 pf	10	4
XFM-249S03-LF	24,988	BF15	3	5	40	12	910 // 25 pf	6	4
XFM-250S01-LF	25,00	BF19	6	2,5	40	5	400 // 13 pf	8	5
XFM-500S01-LF	50,00	BF25	3	3,5	40	20	1800	8	3
XFM-700S01-LF	70,00	BF10-13.0	2	3,05	65	16	50	4	5

KVG Quartz Crystal Technology GMBH

D-74922 Neckarbischofsheim P.O.B. 61 74924 Neckarbischofsheim Waibstadter Strasse 2 - 4
 Tel: +49 (0) 7263 / 648 - 0 Fax: +49 (0) 7263 / 6196 e-mail:info@kvg-gmbh.de




ROHS-Compliant Product

Monolith-Selectionfilter




Case Style BF10-13.0; BF10-15.9

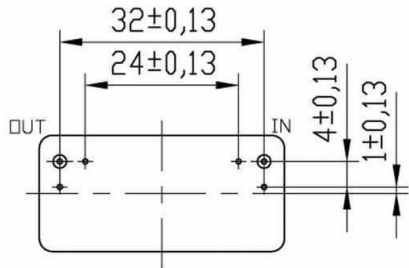


DIN IEC 49(CO)208
Typ F02

BF10-13.0 Height = 13.0mm
BF10-15.9 Height = 15.9mm

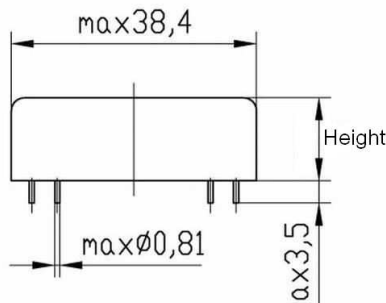


Case Style BF14 / BF15

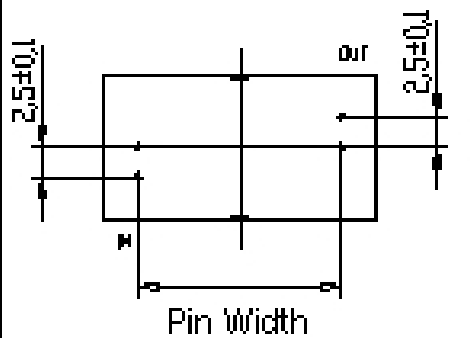

DIN IEC 49(CO)208
Typ F06

Dimensions

	Width max.	Pin-Width ± 0.25
BF14	18.5	13.4
BF15	23.0	17.8

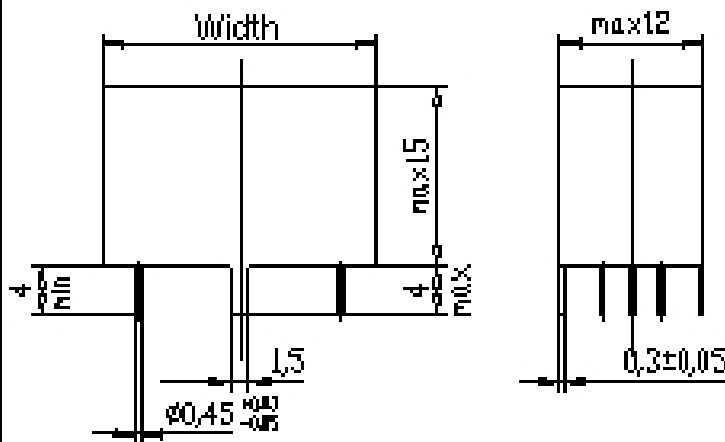

KVG Quartz Crystal Technology GMBH

D-74922 Neckarbischofsheim P.O.B. 61 74924 Neckarbischofsheim Waibstadter Strasse 2 - 4
Tel: +49 (0) 7263 / 648 - 0 Fax: +49 (0) 7263 / 6196 e-mail: info@kvg-gmbh.de




ROHS-Compliant Product


Monolith-Selectionfilter



Case Style BF19

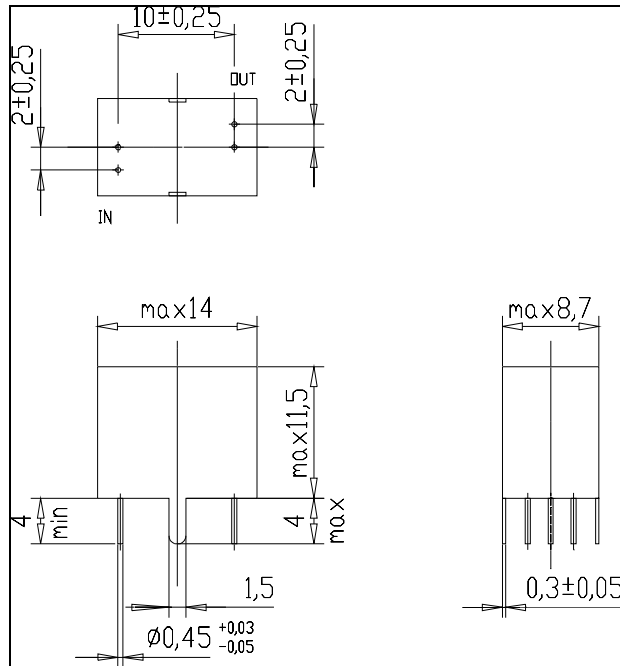

Case Style BF25

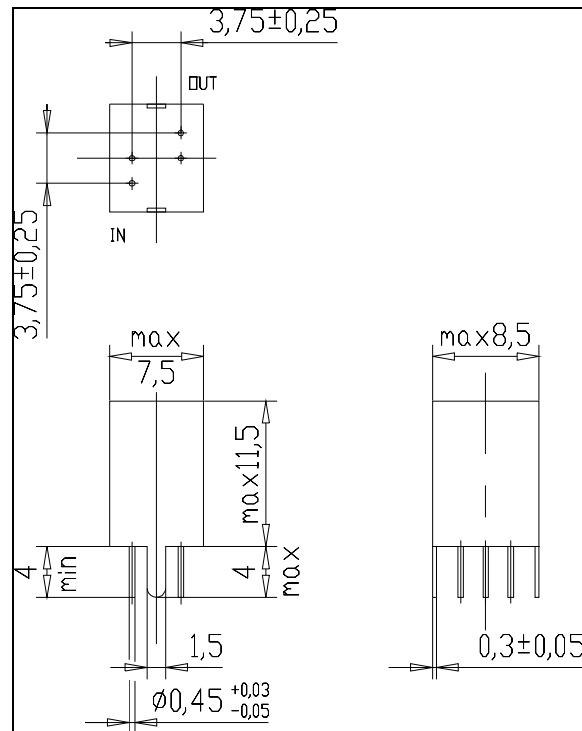

KVG Quartz Crystal Technology GMBH

D-74922 Neckarbischofsheim P.O.B. 61 74924 Neckarbischofsheim Waibstadter Strasse 2 - 4
Tel: +49 (0) 7263 / 648 - 0 Fax: +49 (0) 7263 / 6196 e-mail: info@kvg-gmbh.de




ROHS-Compliant Product

Monolith-Selectionfilter



Case Style BF31

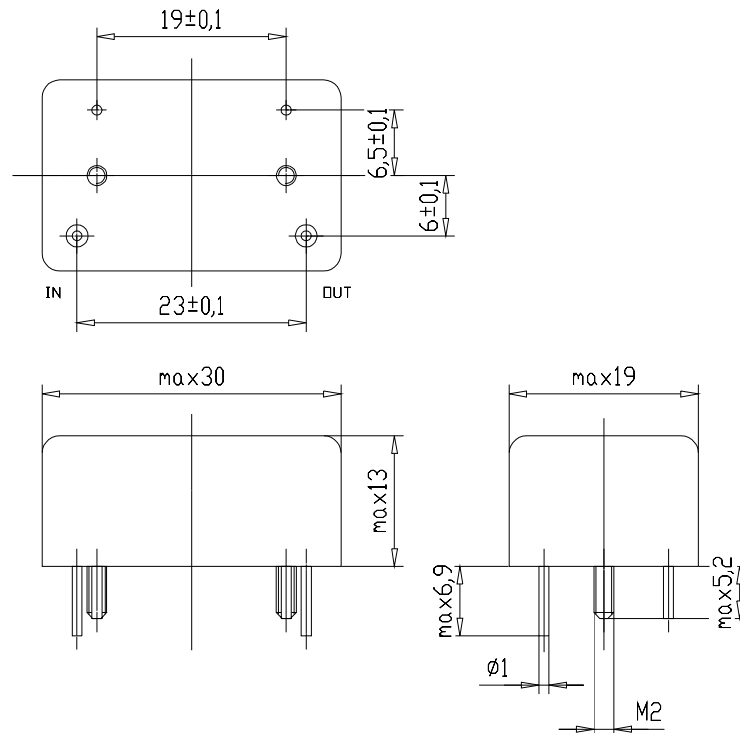

KVG Quartz Crystal Technology GMBH

D-74922 Neckarbischofsheim P.O.B. 61 74924 Neckarbischofsheim Waibstadter Strasse 2 - 4
Tel: +49 (0) 7263 / 648 - 0 Fax: +49 (0) 7263 / 6196 e-mail: info@kvg-gmbh.de