



High Performance LPN LGS (VC)OCXO O-30CXXXXXX1-LF

DESCRIPTION:

O-30CXXXXXX1-LF - 100.000 MHz is a high performance 'Oven Controlled Crystal Oscillator' (VC)OCXO offering exceptional low Phase Noise (LPN), low G-Sensitivity (LGS) and tight frequency stability. The RoHS-compliant part (LF) comes in a small sized hermetically sealed metal can package what makes it suitable for humid climate environment.




FEATURES:

- Low G-Sensitivity
- Very Low Phase Noise
- Tight Frequency Stability
- Hermetically Sealed Package
- Good Long-Term Stability
- Frequency Tuning Input
- Reference Voltage Output
- High RF Output Power

APPLICATIONS:

- Test & Measurement Equipment
- Radar Systems
- Instrumentation Reference
- Microwave Communication
- Clock Reference for Microwave Signal Source
- Synthesizer Reference Clock
- Telecom Systems

Phase Noise OCXO 100.000 MHz

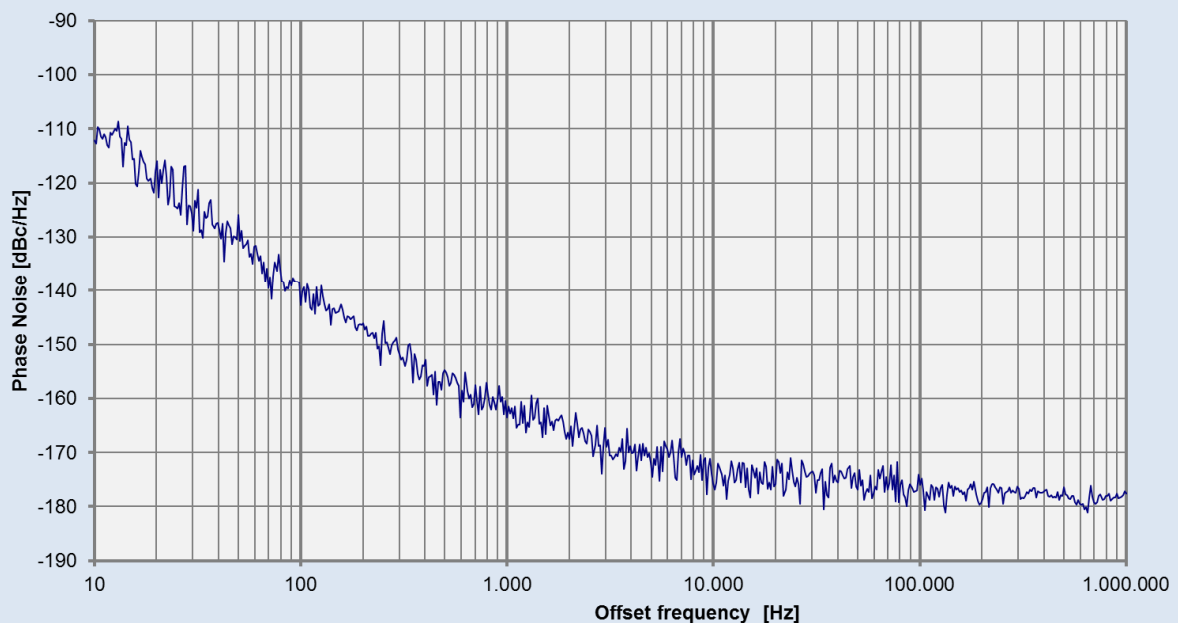

KVG Quartz Crystal Technology GmbH

Waibstadter Strasse 2 – 4, 74924 Neckarbischofsheim, Germany
Tel.: +49 (0) 7263/648-0; Fax: +49 (0) 7263/6196
email: info@kvg-gmbh.de web: www.kvg-gmbh.de



ROHS-Compliant Product

O-30CXXXXXX1-LF



1. Specification			
Test conditions: $V_S = +12\text{ V}$, $V_C = +5.0\text{ V}$; $T_A = +25 \pm 3\text{ }^\circ\text{C}$ unless otherwise stated			
Nominal frequency:	80 MHz to 150.000 MHz		
Initial frequency tolerance: (after 30 min power ON)	$\leq \pm 300\text{ ppb}$		
Frequency stability vs. temperature range -20 °C to +70 °C (T-option 2070):	<u>Class H</u> $\pm 100\text{ ppb}$	<u>Class G</u> $\pm 50\text{ ppb}$	<u>Class E</u> $\pm 20\text{ ppb}$
Frequency stability vs. temperature range -40 °C to +85 °C (T-option 4085):	<u>Class I</u> $\pm 200\text{ ppb}$	<u>Class H</u> $\pm 100\text{ ppb}$	<u>Class G</u> $\pm 50\text{ ppb}$
Frequency stability vs. supply voltage changes $V_S \pm 5\%$: vs. load changes 50 Ohm $\pm 5\%$:	$\leq \pm 5.0\text{ ppb}$ $\leq \pm 5.0\text{ ppb}$		
Aging (after 30 days of continuous operation) per day: 1st year: 10 years:	$\leq \pm 5.0\text{ ppb}$ $\leq \pm 500\text{ ppb}$ $\leq \pm 2\text{ ppm}$		
Warm up time: (within $\pm 50\text{ ppb}$ referred to final frequency after 1 hour)	$\leq 5\text{ min}$		
Frequency control range:	$\geq \pm 3\text{ ppm}$		
Frequency control voltage range V_C :	0 V ... +10 V		
Tuning slope / Linearity:	Positive / $\leq 10\%$		
Reference voltage V_{REF} :	+10.0 V + 5 %		
Supply voltage V_S :	+12.0 V $\pm 5\%$		
Supply current consumption I_S steady state : during warm-up:	$\leq 150\text{ mA}$ $\leq 350\text{ mA}$		
Output level:	$\geq +10\text{ dBm}$		
Output wave form: Output load:	Sine wave 50 Ohm		
Harmonics: Spurious (10 Hz to 1 MHz from carrier):	$\leq -30\text{ dBc}$ $\leq -80\text{ dBc}$		

4				KVG Quartz Crystal Technology GmbH P.O. Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3				
2				
1		11.05.2015	Rudolph	
ED	Description	Date	Name	



ROHS-Compliant Product

O-30CXXXXXX1-LF




1. Specification (cont.)				
Phase Noise [dBc/Hz] @ 100 MHz at offset frequency:	<u>Option A</u>	<u>Option B</u>	<u>Option C</u>	<u>Option D</u>
10 Hz:	≤ -92	≤ -97	≤ -100	≤ -105
100 Hz:	≤ -125	≤ -130	≤ -135	≤ -138
1 kHz:	≤ -155	≤ -157	≤ -160	≤ -163
10 kHz:	≤ -173	≤ -173	≤ -173	≤ -170
100 kHz:	≤ -177	≤ -175	≤ -175	≤ -170
1 MHz:	≤ -180	≤ -178	≤ -175	≤ -170
Short term stability (Allan Deviation) @ tau = 1 sec:	≤ 5 x 10 ⁻¹¹			
G-Sensitivity (each axis):	≤ 1 ppb/g			
Storage temperature range:	-45 °C ... +90 °C			
2. Environmental conditions				
According to KVG Product Qualification Procedure AA-QM-202				
3. Marking				
Manufacturer's name, date code (week/year); Specification; Nominal frequency				

4				KVG Quartz Crystal Technology GmbH P.O. Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3				
2				
1		11.05.2015	Rudolph	
ED	Description	Date	Name	

4. Case

Case style: BF9-IS-S-15.0

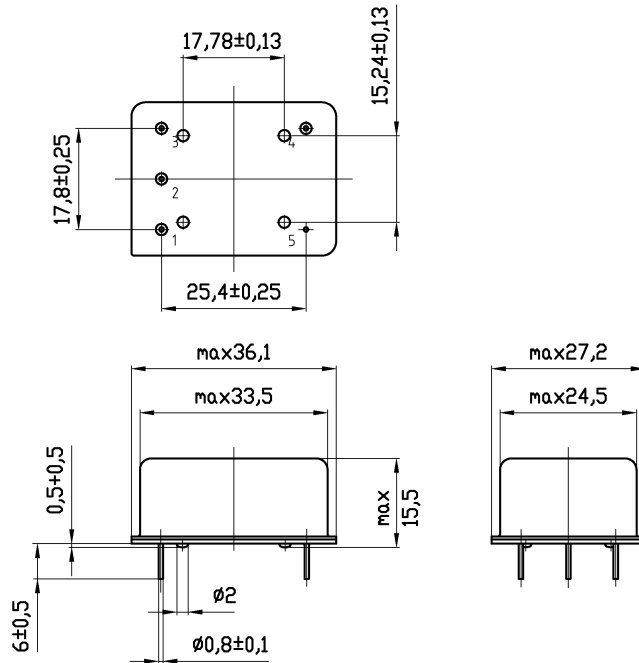

Height: 15.5 mm max

Pin configuration

1. Control voltage V_C in
2. Reference voltage V_{ref} out
3. Supply voltage V_S
4. RF output
5. Ground, case

Termination finish:

Sn95.5 Ag3.8 Cu

Solderability:

DIN IEC 68-2-20 (TA)

RoHS-6 compliant

5. Ordering Information

Type Code	Package Code	Supp. Volt.	Temp. Range	Freq. Stab. f(T)	Phase Noise Option	G-Sens.	RoHS compl.	Nominal Frequency
OEXO	36 x 27	12 V	LOW / HIGH	E to I	A to E	YES = 1	-LF	-XXX.YYY MHz
O	-30	C	2070	G	B	1	-LF	-100.000 MHz

Example: O-30C2070GB1-LF-100.000 MHz

4								KVG Quartz Crystal Technology GmbH
3								P.O. Box 61
2								D-74924 Neckarbischofsheim
1				11.05.2015	Rudolph			Tel. +49 (0) 7263 / 648-0
ED		Description		Date	Name			Fax. +49 (0) 7263 / 6196