



High Performance SMD (VC)OCXO

DESCRIPTION:

O-60CXXX-LPN-LGS-LF is a 10.000 MHz high performance 'Oven Controlled Crystal Oscillator' (VC)OCXO offering exceptional low phase noise (LPN), low G-Sensitivity (LGS) and tight frequency stability.

The part comes in a small sized SMD package taped on reel what makes it also suitable for automatic pick & place machine assembly.



FEATURES:


- Small SMD package
- Fast Warm-up Time
- Low Power Consumption
- Tight Frequency Stability
- Excellent Long-Term Stability
- Low Phase Noise, Low G-Sensitivity
- Frequency Tuning Input
- Reference Voltage Output

APPLICATIONS:

- Instrument Reference
- Microwave Communication
- Clock Reference for Microwave Signal Source
- Test & Measurement
- Telecom Systems



Phase Noise SMD OCXO 10.000 MHz

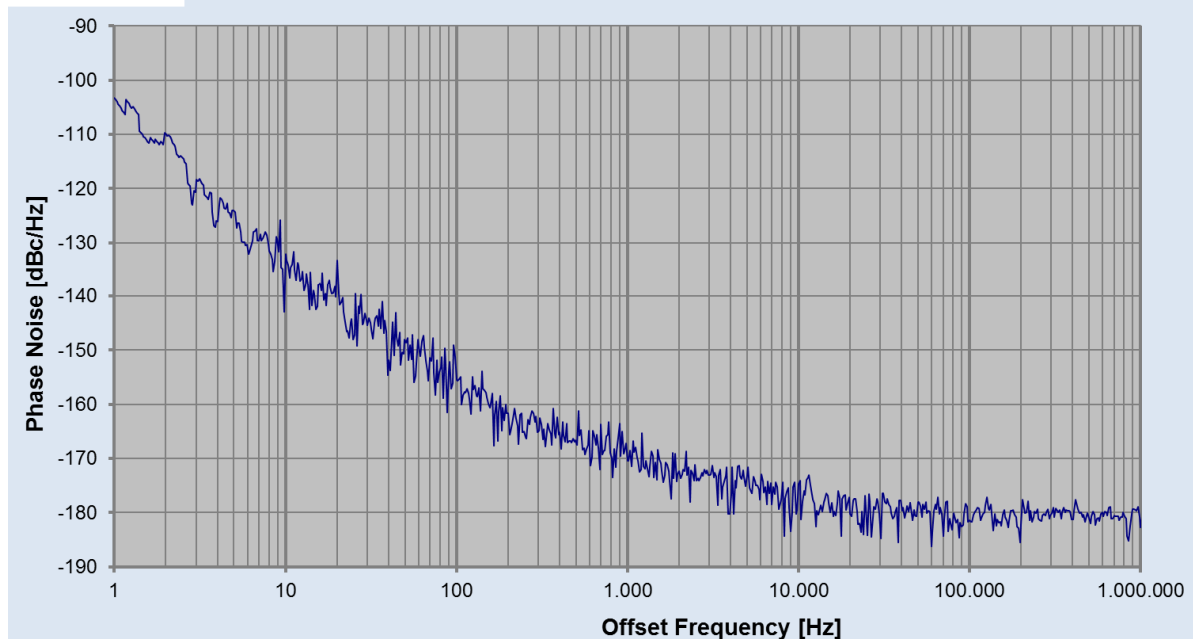

KVG Quartz Crystal Technology GmbH

Waibstadter Strasse 2 – 4, 74924 Neckarbischofsheim, Germany

Tel.: +49 (0) 7263/648-0; Fax: +49 (0) 7263/6196

email: info@kvg-gmbh.de

web: www.kvg-gmbh.de



ROHS-Compliant Product

O-60CXXX-LPN-LGS-LF



1. Specification			
Test conditions: $V_S = +12\text{ V}$, $V_C = +5.0\text{ V}$; $T_A = +25\text{ °C}$ except when stated otherwise			
Nominal Frequency F_N :	10.000 MHz		
Initial factory frequency adjustment tolerance: (after 30 min power ON)	$\leq \pm 0.1\text{ ppm}$		
Frequency stability vs. temperature range -20 °C to +70 °C:	<u>Class G</u> $\pm 50\text{ ppb}$	<u>Class F</u> $\pm 30\text{ ppb}$	<u>Class E</u> $\pm 20\text{ ppb}$
Frequency stability vs. temperature range -30 °C to +80 °C:	<u>Class I</u> $\pm 200\text{ ppb}$	<u>Class H</u> $\pm 100\text{ ppb}$	<u>Class G</u> $\pm 50\text{ ppb}$
Frequency stability vs. supply voltage changes $V_S \pm 5\%$: vs. load changes 50 Ohm $\pm 5\%$:	$\leq \pm 1.0\text{ ppb}$ $\leq \pm 1.0\text{ ppb}$		
Aging (after 30 days of continuous operation): per day: 1st year: 10 years:	<u>Option X</u> $\leq \pm 0.5\text{ ppb}$ $\leq \pm 50\text{ ppb}$ $\leq \pm 0.3\text{ ppm}$	<u>Option Y</u> $\leq \pm 0.2\text{ ppb}$ $\leq \pm 30\text{ ppb}$ $\leq \pm 0.2\text{ ppm}$	
Frequency control range (referred to F_N) :	$\geq \pm 0.4\text{ ppm}$		
Frequency control voltage range V_C :	0.5 V ... +9.5 V		
Tuning slope dF/dV_C :	positive		
Reference Voltage V_{ref} : Source resistance of V_{ref} : Recommended load impedance:	+9.5 V $\leq 100\text{ Ohm}$ $\geq 10\text{ kOhm}$		
Supply voltage V_S :	$+12.0\text{ V} \pm 5\%$		
Supply current I_S : steady state @ $T_A = +25\text{ °C}$: during warm-up:	<u>-20 to +70 °C</u> $\leq 150\text{ mA}$ $\leq 400\text{ mA}$	<u>-30 to +80 °C</u> $\leq 180\text{ mA}$ $\leq 500\text{ mA}$	
Warm up time @ $T_A = +25\text{ °C}$ to $dF/F < \pm 5 \times 10^{-8}$ referred to final frequency after 1 hour:	$\leq 5\text{ min}$		
Output voltage : level: load :	sine wave $\geq +8\text{ dBm}$ 50 Ohm		
Harmonics: Spurious (10 Hz to 1 MHz from carrier):	$\leq -30\text{ dBc}$ $\leq -80\text{ dBc}$		

4				KVG Quartz Crystal Technology GmbH P.O. Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3				
2	Short Term stability	18.11.2015	Schweickert	
1		18.07.2014	Rudolph	
ED	Description	Date	Name	




ROHS-Compliant Product

O-60CXXXX-LPN-LGS-LF



1. Specification (cont.)						
Short term stability (Allan Variance) @ tau = 1 sec:				Typical 2×10^{-12}		
G-Sensitivity (each axis):				≤ 1 ppb/g		
Phase noise max. values [dBc/Hz] at offset frequency:	Option A	Option B	Option C	Option E	Option F	Option G
1 Hz:	-105	-110	-115	-95	-100	-105
10 Hz:	-135	-140	-142	-125	-130	-135
100 Hz:	-155	-155	-155	-153	-155	-155
1 kHz:	-165	-165	-165	-165	-165	-165
10 kHz:	-170	-170	-170	-175	-175	-175
100 kHz:	-170	-170	-170	-180	-178	-176
1 MHz:	-170	-170	-170	-180	-180	-176
Temperature ranges Operable: Storage:				-40 °C ... +85 °C -45 °C ... +90 °C		
2. Environmental conditions						
According to KVG Product Qualification Procedure AA-QM-202						
3. Marking						
Manufacturer's name, date code (week/year); Specification; Nominal frequency						

4				KVG Quartz Crystal Technology GmbH P.O. Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
3				
2	Short Term stability	18.11.2015	Schweickert	
1		18.07.2014	Rudolph	
ED	Description	Date	Name	

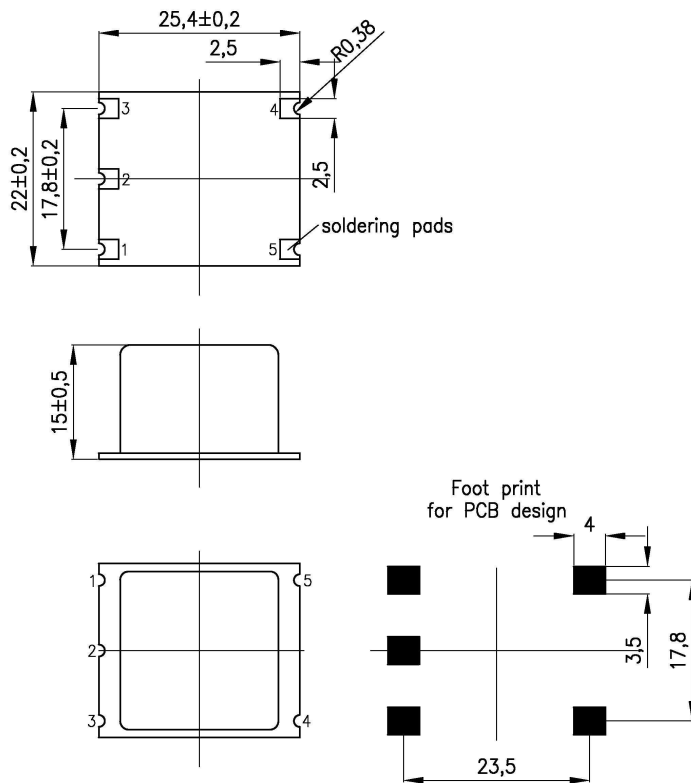4. Case
Case style: BF144-15.5A-SMD

Height: 15.5 mm max
Pin configuration

1. Control voltage V_C in
2. Ref. voltage V_{REF} out
3. Supply voltage V_S
4. RF output
5. Ground, case

Termination finish:

 NiAu (Gold 50-120 nm over Nickel 4-8 μm)

Moisture Sensitivity Level: 2
Solderability:

DIN IEC 68-2-20 (TA)


RoHS-6 compliant
5. Ordering Information

Type Code	Package Code	Supp. Volt.	Temp. Range	Freq. Stab. f(T)	AGING f(t)	Phase Noise Option	G Sens.	RoHS compl.	Nominal Frequency
OCXO	25.4 x 22.8	12 V	LOW /HIGH	E to I	W, X or Y	A to G	YES = 1		XXX.YYY MHz
O-	60	C	2070	F	X	A	1	-LF	-10.000 MHz

Example: O-60C2070FXB1-LF-10.000 MHz


4									KVG Quartz Crystal Technology GmbH
3									P.O. Box 61
2		Short Term stability			18.11.2015	Schweickert			D-74924 Neckarbischofsheim
1					18.07.2014	Rudolph			Tel. +49 (0) 7263 / 648-0
ED		Description			Date	Name			Fax. +49 (0) 7263 / 6196

6. Recommended soldering profile

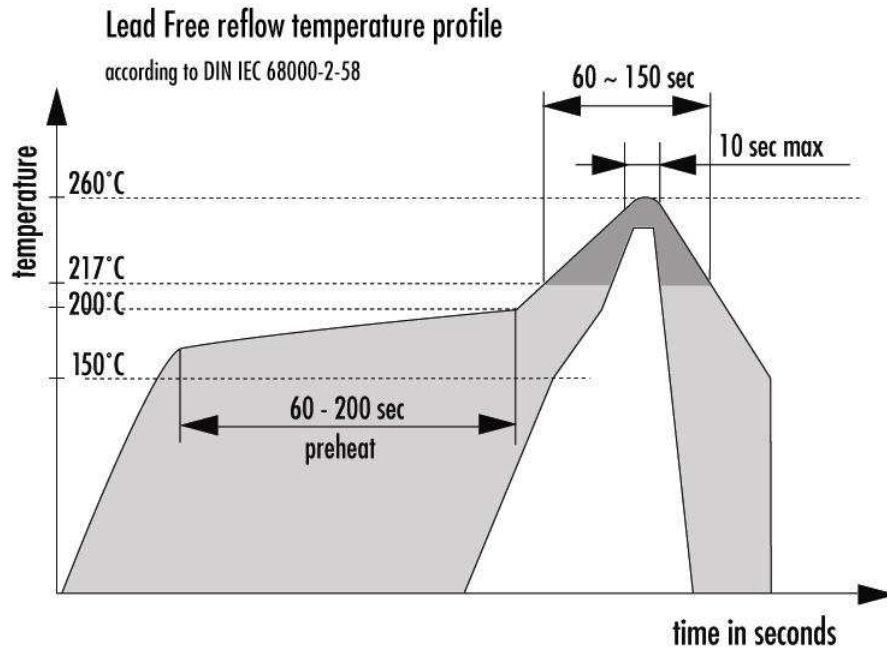

7. Tape & Reel

max. 150 pcs per tape.

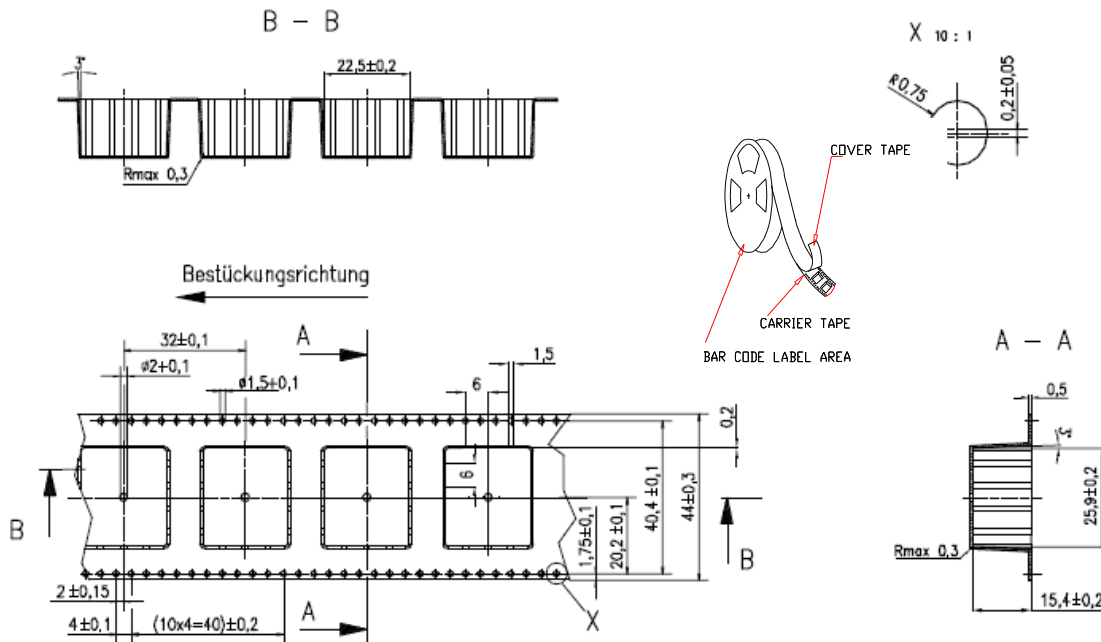

4				KVG Quartz Crystal Technology GmbH
3				P.O. Box 61
2	Short Term stability	18.11.2015	Schweickert	D-74924 Neckarbischofsheim
1		18.07.2014	Rudolph	Tel. +49 (0) 7263 / 648-0
ED	Description	Date	Name	Fax. +49 (0) 7263 / 6196