




HC-35/U



Quartz Crystal Units AT-Cut, 5 - 300 MHz

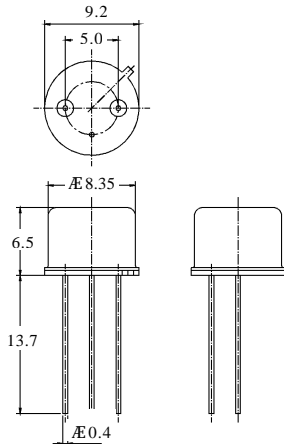

All dimensions in mm (max)

DIN 45110: T1A
 IEC 122-3: CK
 NFC 93-601: n^o 12A
 MIL-H-10056: HC-35/U
 Welded metal enclosure
 (inert atmosphere)
 with wire leads

HC-35/U			Temperature Stability in the Temperature Range						Nom. Temp. ± 5°C ¹⁾
			-55°C...+105°C		-20°C...+70°C				
Overtone	Frequency [MHz]	Type	± 50ppm	± 25ppm	± 20ppm	± 10ppm	± 7ppm	± 5ppm	± 2ppm
1.OT	5...10	TO 71xx	01	02	03	04	06	-----	05
	10...30	TO 71xx	01	02	03	04	06	07	05
3.OT	25...90	TO 71xx	11	12	13	14	16	17	15
5.OT	60...150	TO 71xx	21	22	23	24	26	27	25
7.OT	110...210	TO 71xx	31	32	33	34	36	37	35
9.OT	150...300	TO 71xx	41	42	43	44	46	47	45

Calibration tolerance: ± 10 ppm

¹⁾ Nom. Temp. = Nominal temperature for oven application to be given with the order.

Motional Resistance R1

Overtone	Frequency [MHz]	R1max [Ω]
1. OT	5...10	80
1. OT	10...15	50
1. OT	15...20	40
1. OT	20...35	30
3. OT	25...50	100
3. OT	50...100	90
5. OT	60...80	150
5. OT	80...160	100
7. OT	110...210	150
9. OT	150...300	200

Standard resonance for fundamental crystals: load resonance with $C_L = 30 \pm 0.5\text{pF}$
 Overtone crystals: series mode

Shunt capacitance: 5...10MHz: $C_0 = 2.2\text{pF} \pm 0.8\text{pF}$
 10...300MHz: $C_0 = 3.0\text{pF} \pm 1.0\text{pF}$

Crystal units with different tolerances or additional data upon request.

KVG Quartz Crystal Technology

D-74922 Neckarbischofsheim P.O.B. 61 74924 Neckarbischofsheim Waibstadter Strasse 2 - 4
 Tel: +49 (0) 7263 / 648 - 0 Fax: +49 (0) 7263 / 6196 e-mail: info@kvg-gmbh.de
 Handelsregister: Amtsgericht Mannheim Nr. 340185 Geschäftsführer: M. Klimm; G. Krauskopf