

2. Environmental conditions

According to KVG Product Qualification Procedure AA-QM-200

3. Marking




Manufacturer's name, date code(week/year)

Specification

Center frequency

4. Case

Case style: BF189-2.0B




Pin configuration

1. Control Voltage V_C
2. Tri-State Control Input
3. Ground, Case
4. RF Output
5. Compl. RF Output
6. Supply voltage V_S

| | | | | |
|----|--|-------------|-------------|--|
| 4 | Package Dimensions | 20.08.2009 | Zupan | KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196 |
| 3 | +25ppm from -40°C to +85°C deleted | 26.11.2008 | Zupan | |
| 6 | +25ppm from -40°C to +85°C; Frequency Range extended | 24.07.2018 | Rudolph | |
| 5 | Jitter < 1 ps rms | 24.08.2015 | Balzer | |
| ED | Description | Date | Name | |

5. Reflow Soldering Profile

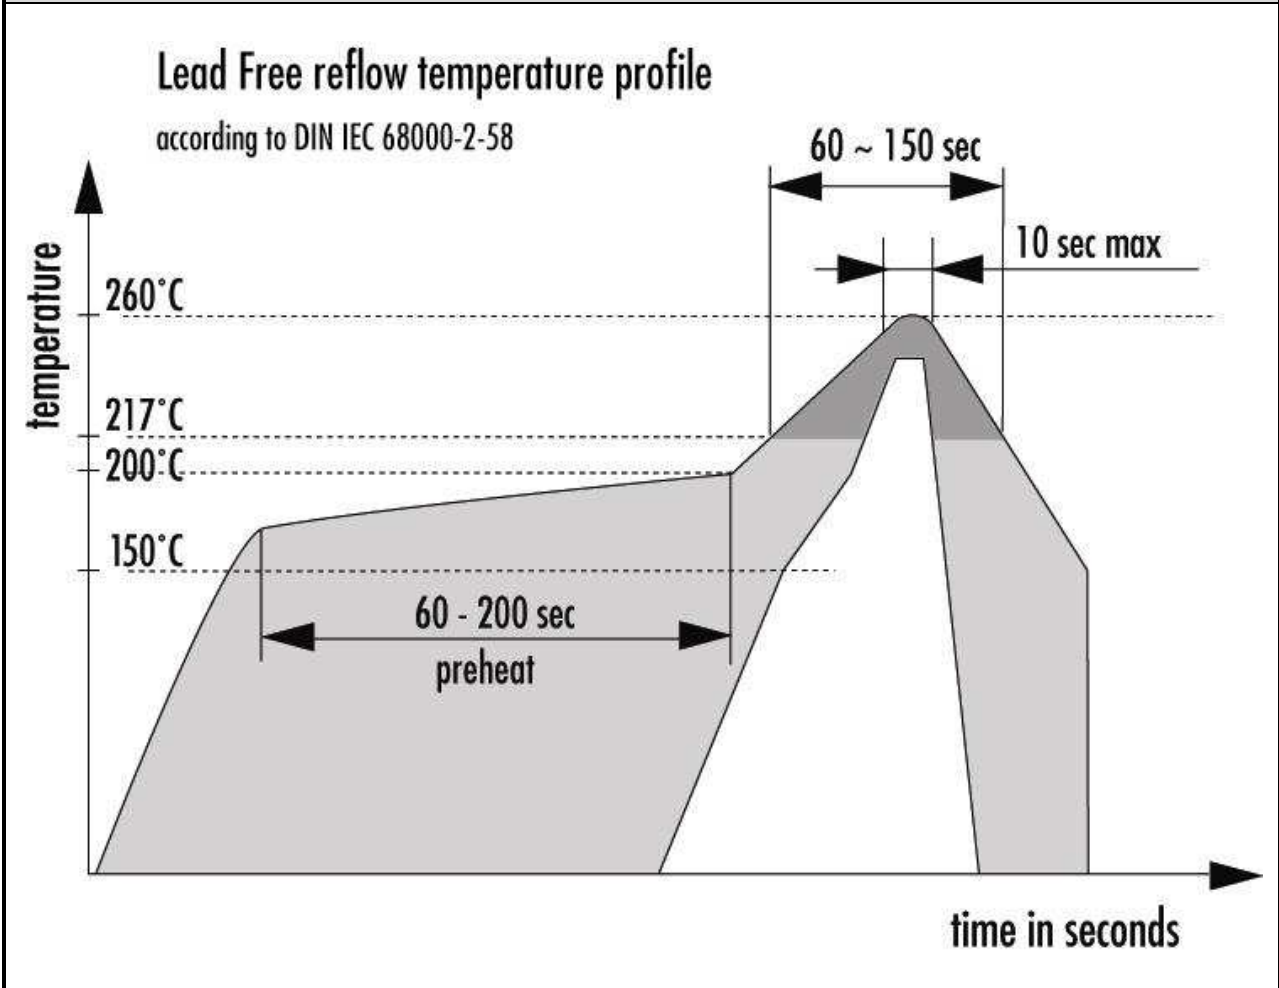

| | | | | |
|-----------|--|-------------|-------------|--|
| 4 | Package Dimensions | 20.08.2009 | Zupan | KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196 |
| 3 | +25ppm from -40°C to +85°C deleted | 26.11.2008 | Zupan | |
| 6 | +25ppm from -40°C to +85°C; Frequency Range extended | 24.07.2018 | Rudolph | |
| 5 | Jitter < 1 ps rms | 24.08.2015 | Balzer | |
| ED | Description | Date | Name | |